


KANON / CORREX / TECLOCK

Kanon Torque Gauge

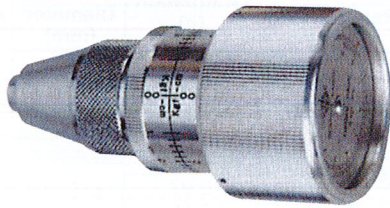


Model	Range	Graduation	Holding Dia mm
90 (I) SGK	10 – 90gf.cm	2gf.cm	1 – 6.5
150 (I) SGK	20 – 150gf.cm	2gf.cm	1 – 6.5
300 (I) SGK	40 – 300gf.cm	5gf.cm	1 – 6.5
600 (I) SGK	50 – 600gf.cm	10gf.cm	1 – 6.5
1200 (I) SGK	100 – 1,200gf.cm	20gf.cm	1 – 6.5
2400 (I) SGK	200 – 2,400gf.cm	50gf.cm	1 – 6.5
1.5 (II) SGK	0.1 – 1.5kgf.cm	0.02kgf.cm	1 – 8.5
2.4 (II) SGK	0.2 – 2.4kgf.cm	0.02kgf.cm	1 – 8.5
3.6 (II) SGK	0.4 – 3.6kgf.cm	0.05kgf.cm	1 – 8.5
6 (II) SGK	0.5 – 6kgf.cm	0.1kgf.cm	1 – 8.5
9 (II) SGK	1 – 9kgf.cm	0.2kgf.cm	1 – 8.5
15 (II) SGK	1 – 15kgf.cm	0.2kgf.cm	1 – 8.5

CORREX Tension Gauge



Model	Measuring Range (g)	Graduation (g)
3G	0.3 – 3	0.1
6G	0.6 – 6	0.2
15G	2 – 15	0.5
30G	3 – 30	1
50G	5 – 50	1
100G	10 – 100	2
150G	15 – 150	5
250G	25 – 250	5
500G	50 – 500	5
1000G	100 – 1000	20
2000G	200 – 2000	50

Rotary Slip & Adjustable Type Torque Driver



KANON

Model	Measuring Range (cN.m)	Graduation (cN.m)	Total Length (mm)
RTD 15CN	2 – 15	0.1	99
RTD 30CN	4 – 30	0.2	99
RTD 60CN	10 – 60	0.5	106
RTD 120CN	20 – 120	1	122
RTD 260CN	60 – 260	2	138
RTD 500CN	100 – 500	2.5	151

Teclock Rubber Hardness Tester



Model	Range (°)	Resolution (°)	Application Standard	Measuring Object
GS-701G	0 ~ 100	1	JIS S6050	Sponge, Felt Soft Rubber Hard Form Bobbin, Potters Clay
GS-702G	0 ~ 100	1	JIS K7215D	Hard Plastic, Hard Rubber, Soft Plastic
GS-703G	0 ~ 100	1	JIS K6301C Shore D	Hard Rubber
GS-706G	0 ~ 100	1	JIS K6301C Shore C	Ordinary Rubber
GS-709G	0 ~ 100	1	ASTM02240 Shore A	Ordinary Rubber, Soft Plastic